

XVT Xtreme Value Tower Series UPS'



CLOSING THE GAP BETWEEN PRICING AND FEATURES


As the value leader in power protection, **Xtreme Power Conversion Corporation**, provides uptime and data center solutions that solve “real world” customer problems. Recogniz-


ing that the status quo of overpriced availability solutions had to be challenged, Xtreme provides more product features and benefits at prices never before achieved in the market.

OPTIMIZED NETWORK GRADE POWER PROTECTION

The **Xtreme Value Tower Series (XVT)** UPSs provides the ideal power protection solution for servers, VOIP equipment, business telephone systems, desktops and other network grade equipment. The **XVT Series** is comprised of four models: 600VA, 800VA, 1200VA, and 1500VA.

Xtreme Value is achieved by providing features commonly available in UPSs of twice the cost, or more. Thus, these feature rich, line interactive, network grade UPSs are provided at prices commonly seen in standby UPSs. Xtreme features, Xtreme Reliability and more VA for the money make the **XVT Series** the best choice in network power protection.

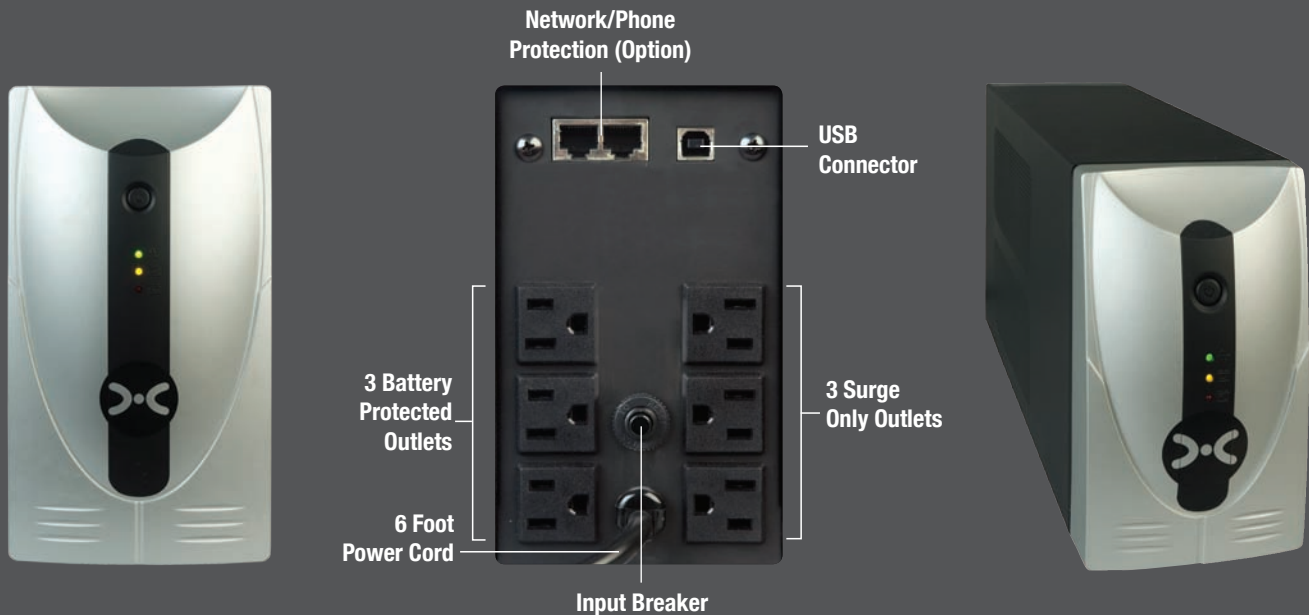

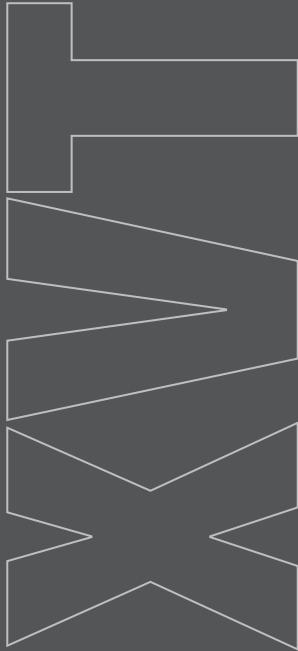


- **Network Grade Power Protection**
Best cost to performance ratio in four optimized sizes (600VA, 800VA, 1200VA & 1500VA)
- **Line Interactive Topology**
Provides premium Automatic Voltage Regulation (AVR) to protect sensitive equipment
- **Longer Runtimes than competitive models**
Provides power during longer outages
- **User Replaceable batteries**
Simplified design allows users to quickly replace batteries when needed
- **USB Communications**
Allows “plug & play” communications between servers, desktops and the UPS
- **Software CD**
Compatible with major operating systems including Windows Vista
- **Outstanding Warranty**
Xtreme Power stands behind the XVT line with a two year electronics warranty
- **Quieter Operation**
Allows businesses to place the UPS’ virtually anywhere without worrying about disruption
- **More Outlets**
Provides Greater Flexibility via three battery protected outlets and three surge protected outlets
- **Xtreme Pricing**
The industry’s most competitive pricing for this feature set and associated runtimes
- **Prolonged Battery Life**
Wide operating voltage range requires that the UPS requires less power from the batteries less frequently; therefore extending battery life and lowering the “Total Cost of Ownership”

XPRT BATTERY RUNTIMES (TYPICAL)

Model #		
XVT-600	1 PC + 1 LCD	~21 Mins
XVT-800	1 PC + 1 LCD	~26 Mins
XVT-1200	1 PC + 1 LCD	~42 Mins
XVT-1500	1 PC + 1 LCD	~50 Mins

XVT SPECIFICATIONS

		XVT-600	XVT-800	XVT-1200	XVT-1500
CAPACITY		600VA/360W	800VA/480W	1200VA/720W	1500VA/900W
INPUT	Phase	Single phase			
	Voltage Range	94V-144V/±5V			
	Frequency	60HZ±5Hz			
OUTPUT	Voltage (battery mode)	120V±10%			
	Waveform	Pure Sine Wave (Typical)			
	Frequency	=AC mode-follow utility Battery mode 60± .5Hz			
	Frequency Stability	<0.5HZ (battery operation)			
	Transfer Time	4ms (Typical)			
PROTECTION	Surge Protection	320 Joules			
	Input Protection	Compliance with IEEE 587			
	Short Circuit	Breaker			
BATTERY	Battery Type	12V Sealed lead acid, maintenance free			
	Recharge	After fully discharged, less than 10 hours to 100% capacity			
	~Backup Time (full load) & half load	3 min (full load) ≥8 min (50% load)			
	Charge Current	1.5A (Max)			
	Battery Configuration	1x12V/7AH	1x12V/9AH	2x12V/7AH	2x12V/9AH
	User Replaceable	Yes			
INDICATION	AC Mode	Green LED on, Orange LED on, Red LED off, no beep			
	Charging Battery	Orange LED on			
	Battery Mode	Green LED and Orange LED off, Red LED flash, buzzer slow beep			
	Battery Low	Green LED and Orange LED off, Red LED flash, buzzer fast beep			
OTHER	Audible Noise at 1m	<45dB			
	Temperature	0-40°			
	Humidity	0%-90%			
	Net/Gross Weight	15 lbs (6.8kg)/ 15.88 lbs (7.2kg)	16.76 lbs (7.6kg)/ 18.09 lbs (8.2kg)	27.57 lbs (12.5kg)/ 28.67 lbs (13kg)	31.32 lbs (14.2kg)/ 32.42 lbs (14.7kg)
	Unit Dimension (L×W×H)	370x95x160 (mm)/14.57x3.75x6.3 (inch)		430x125x220 (mm)/16.93x4.93x8.67 (inch)	
	Packing Dimension (L×W×H)	400x145x245 (mm)/15.75x5.7x9.65 (inch)		470x180x310 (mm)/18.5x7.1x12.2 (inch)	
AGENCY APPROVALS	UL 1778, cUL, FCC Class B				
OUTLETS	6				
CORD LENGTH/COLOR	6 Feet/Black				
BEZEL COLOR	Brushed Metallic Outer/Black Inner				
COMMUNICATIONS	USB				
INCLUDED IN BOX	One User's Manual, One 6ft USB cable				



Xtreme Power Conversion Corporation
 920 Bay Vista Blvd. • Englewood, FL 34223
 Tel: 800.582.4524
 www.xpcc.com